Den Braven

Chain Spray

High(er) viscosity chain spray

PRODUCT DESCRIPTION

Chain Spray is a synthetic lubricant for highly-stressed parts.

KEY BENEFITS

Excellent corrosion protection
Displaces moisture
Does not drip or smear
Good adhesion - sticks even to fast-rotating chains
Produces smooth and quiet running
Water-repellent
Economic

APPLICATIONS

The use of Chain Spray allows long-term internal and external lubrication of roller chains, bearings, gear mechanisms, roller and ball bearings, O-ring seals and all sorts of joints, clutches, chains and wire cables.
-

DIRECTION FOR USE

Shake the aerosol vigorously before use. Spray parts to be treated sufficiently from a distance of approx. 20cm. Allow the spray to penetrate, then spray the surface again if necessary. Chains can be put in operation again after approx. 5 - 10 minutes after spraying.
-

TECHNICAL SPECIFICATIONS

Base	Polybutene
Density	0.686
Frost Resistance	Up to -15°C
Pressure at 20°C [bar]	5.5
Pressure at 50°C [bar]	9.9
Extrusion rate [g/s]	2.5

These are typical values

SURFACE PREPARATIONS AND FINISHING

Before applying remove any greasy residues by e.g. treating the parts with Brake Cleaner first.

SHELF LIFE

Store between + 5°C and +25°C in shaded conditions. Shelf life is 24 months when stored as recommended in original unopened packaging.

HEALTH & SAFETY

Product Safety Data Sheet must be read and understood before use. These are available on request and via our websites

WARRANTY & GUARANTEE

Bostik warrants that its product complies, within its shelf life, to its specification.

DISCLAIMER

All information in this document and in all our other publications (including electronic ones) is based on our current knowledge and experience and is the exclusive (intellectual) property of Bostik. No part of this document may be copied, shown to third parties, reproduced, communicated to the public or used in any other way without Bostik written consent. The technical information in this document serves as an indication and is non-exhaustive. Bostik is not liable for any damage, either directly or indirectly, due to (editorial) errors, incompleteness and/or incorrectness of this document. This includes, but is not limited to, incompleteness and/or incorrectness due to technological changes or any research conducted between the date of publication of this document and the date on which the product is acquired. Bostik reserves the right to amend the wording of this document. Bostik cannot be held liable for any damage, either directly or indirectly, due to the use of the product(s) depicted in this document. The user must read and understand the information in this document and other documents relating to the products prior to the use of the product. The user is responsible for performing all the requisite tests to make sure that the product is suitable for its intended use. We have no influence in what way the product is applied and/or any circumstances relating to events occurring during storage or transport and therefore we do not accept any liability for damage whatsoever. All deliveries are made exclusively in accordance with our general terms of conditions which have been filed at the Dutch Chamber of Commerce.

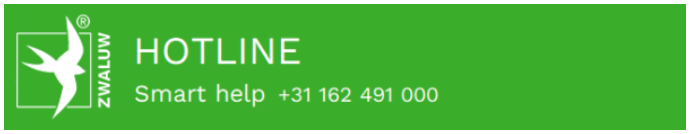

Bostik S.A.
51, ESPLANADE DU GÉNÉRAL DE GAULLE
92800 PUTEAUX - LA DÉFENSE
TÉL. : +33 (1) 49 00 90 00