

Acryl Wet on Wet

How to order

Acryl Wet on Wet is available in 310 ml cartridges packed per 12 in a box. To order your specific Acryl Wet on Wet, please find below the article and EAN codes:

Colour:	Article code:	EAN code:
White	12003764	8711595177429

UCA®-Technology

The compatibility of sealants with paint is ensured by our unique and proven UCA®-Technology. UCA stands for Unique Compatibility Additives. Den Braven sealants with the UCA-logo offer the best possible compatibility between sealants and paint due to selected raw materials, specialized additives and dedicated R&D and testing facilities.

Other products with UCA®-Technology: Acryl Anti-Crack, Hybriseal® 2PS, Monustop, Plasterboard Filler and Stuc-O-Seal®.

Painters problems overpainting sealants

Regular acrylic sealants require sufficient drying time before paint can be applied. Cracking problems can occur if sealants are not completely cured before overpainting. Cracking is a distortion of the film and can occur in long cracked lines or a pattern of small cracks (mud-cracking). Bleeding or discoloration of the surface paint is another common problem with acrylic sealants. Solving the issue when dark spots or discoloured joints occur can be very time and material consuming.

Acryl Wet on Wet and our full acrylic product line with UCA®-Technology is developed to minimise risk of cracking and will not cause discoloration of the end layer. Test always the compatibility and end result when overpainting with value quality paints to ensure perfect end results.



Centre of Excellence

Better results through Knowledge

Den Braven's company payoff is "Better results through Knowledge". Our Centre of Excellence accumulates knowledge which provides her with the latest market insights, developments and trends. This knowledge is shared within the Den Braven Group and amongst our customers and end-users.

This process enables our relations to achieve higher efficiency and better results. This is the true meaning of "Better results through Knowledge". Visit our website to discover more about what the Centre of Excellence could mean for you!

denbraven.com


Den Braven

**APPLY,
PAINT,
DONE**



Acryl Wet on Wet

Unique acrylic sealant developed for quick overpainting


BETTER RESULTS THROUGH KNOWLEDGE

Acryl Wet on Wet

Unique acrylic sealant developed for quick overpainting



- Instantly paintable
- No discoloration of paint
- Minimal risk of cracking
- Remains flexible
- Easy to apply

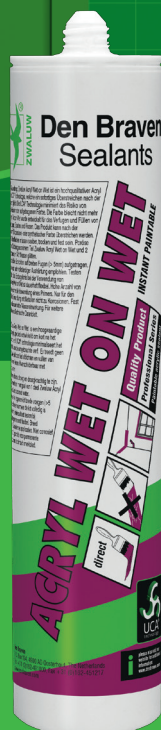

Acryl Wet on Wet


Finishing paint jobs under time pressure? Spot repair and paint instantly? This can be done with Acryl Wet on Wet. An unique sealant developed for quick overpainting with good end results. Acryl Wet on Wet saves you time and effort.

Product Descriptions

Acryl Wet on Wet is a high quality plasto-elastic acrylic sealant especially developed for quick overpainting, during the process of curing. It contains UCA® technology for superb compatibility with water based and alkyd paints. Acryl Wet on Wet does not discolour the paint layer, it prevents cracking and remains flexible after curing.

Applications

Acryl Wet on Wet has been especially developed for sealing connection joints which require quick overpainting such as between stairs, walls, ceilings, skirting boards, windowsills,



Acryl Wet on Wet

wooden and metal window frames, concrete and brickwork. Furthermore the product is fit for filling cracks, screw- and nail holes in walls and ceilings of wood, plastering, gypsum, concrete and brickwork.

Certifications

EN 15651-1: F-INT

Technical Performances

Density	0,71 g/ml
Shore	33
Elongation at break	132%
Tensile strength	0,52 MPa
Skin formation	2 minutes

Visit our website to download the full technical specifications of the Acryl Wet on Wet.



Visit Den Braven YouTube channel

Den Braven offers a wide variety of USP, Application and Commercial movies via here website and YouTube channel. Scan the below displayed QR Code to visit the USP movie of the original Acryl Wet on Wet:



BETTER RESULTS THROUGH KNOWLEDGE

denbraven.com